

Impacta-ProBase

10mm Acoustical Floor Underlayment



Impacta-ProBase 10 floor underlayment is made from recycled rubber tires. ProBase 10 is used under a variety of floors including, tile/marble, carpet and wood flooring. ProBase is excellent for use in lightweight wood frame construction due to its weight & mass. ProBase 10 is 3/8" thick and comes in rolls 4' x 25' (100 sq ft rolls)



Applications:

Typical uses include; apartments, homes, condos, schools, hospitals and any areas where reduction from structural impact noise through the floor to ceiling assembly is required. ProBase underlayment can be installed over concrete, gypsum topping and structural sound plywood sub floors.

- 92% recycled content, qualifies for up to 5 Leed Points
- IIC rating 50+
- Easy to install, 4' x 25' rolls
- Sound control underlay for Tile, Stone, Hardwood & Carpet

Product Data:

Description Made from 92% recycled SBR (Styrene-Butadiene Rubber) tire rubber

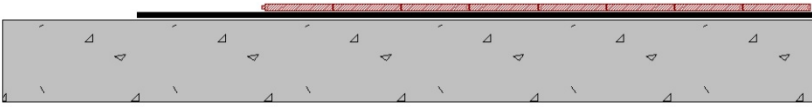
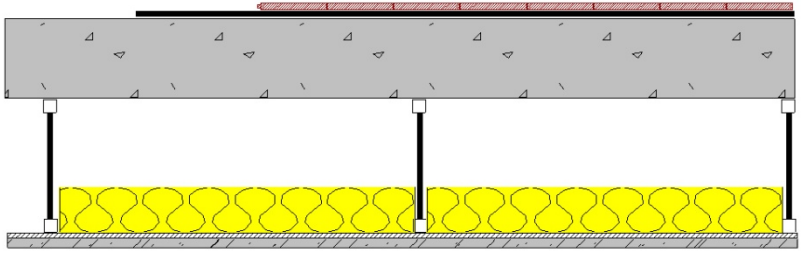

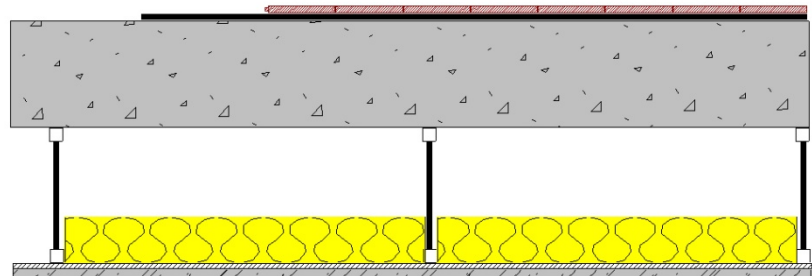
Nominal thickness	10mm
Density (ASTM D-792)	43 lbs cubic ft
Standard width	48" wide
Roll length	25' long
Weight	1.65 lbs per sq ft
Hardness A Shore-Durometer	40-55



Distributed by:

Acoustics performance on back page

Impacta ProBase 10mm Acoustical Testing

Description	Detail	IIC / FIC Rating
<p>10mm Impacta ProBase</p> <p>Glue down Engineered hardwood over 10mm ProBase over 6" slab</p>		<p>Δ 22</p>
<p>10mm Impacta ProBase</p> <p>Glue down Engineered hardwood over 10mm ProBase over 6" slab with a ceiling below</p>		<p>IIC 72</p>
<p>10mm Impacta ProBase</p> <p>Glue down Engineered hardwood over 10mm ProBase over 8" slab</p>		<p>IIC 54</p>
<p>10mm Impacta ProBase</p> <p>Glue down Engineered hardwood over 10mm ProBase over 8" slab with a ceiling below</p>		<p>IIC 74</p>