

Impacta-ProBase

5mm Acoustical Floor Underlayment



Impacta- ProBase 5 floor underlayment is made from recycled rubber tires. ProBase 5 is used under tile/marble, carpet and wood flooring. ProBase is excellent for use in lightweight wood frame construction due to its weight & mass. ProBase 5 is 3/16" thick and comes in rolls 4' x 25' (100 sq ft rolls)

Applications:

Typical uses include; apartments, homes, condos, schools, hospitals and any areas where reduction from structural impact noise through the floor to ceiling assembly is required. ProBase underlayment can be installed over concrete, gypsum topping and structural sound plywood sub floors.



- 92% recycled content, qualifies for up to 5 Lead Points
- IIC rating 50+
- Easy to install, 4' x 25' rolls
- Sound control underlay for tile, stone, & Hardwood

Product Data:

Description Made from 92% recycled SBR (Styrene-Butadiene Rubber) tire rubber


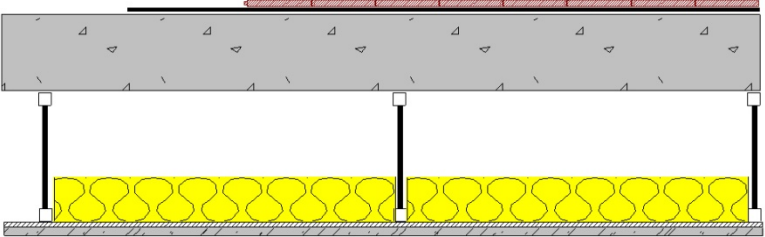
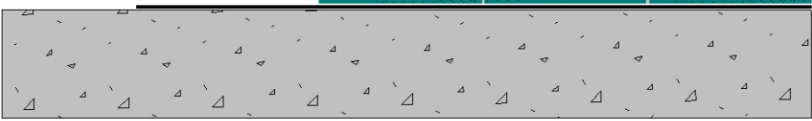

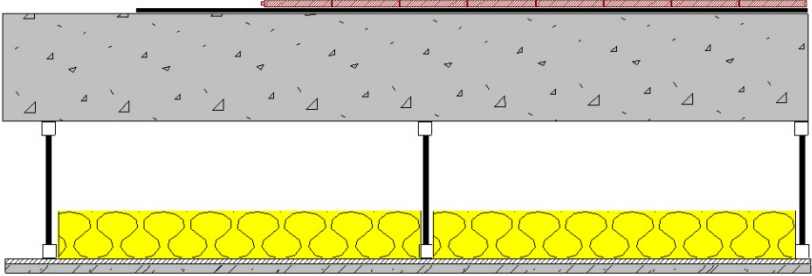
Nominal thickness	5mm
Density (ASTM D-792)	43 lbs cubic ft
Standard width	48" wide
Roll length	25' long
Weight	.80 lb psf
Hardness A Shore-Durometer	40-55



Distributed by:

Acoustics performance on back page

Impacta ProBase 5mm Acoustical Testing

Description	Detail	IIC / FIC Rating
<p>5mm Impacta ProBase</p> <p>Glue down Engineered hardwood over 5mm ProBase over 6" slab</p>		<p>Δ 21 / IIC 51</p>
<p>5mm Impacta ProBase</p> <p>Glue down Engineered hardwood over 5mm ProBase over 6" slab with a ceiling below</p>		<p>IIC 71</p>
<p>5mm Impacta ProBase</p> <p>6" x 6" x 1/2" unglazed quarry tile bonded with thin set to 5mm ProBase glued to 8" slab</p>		<p>IIC 52</p>
<p>5mm Impacta ProBase</p> <p>Glue down Engineered hardwood over 5mm ProBase over 8" slab</p>		<p>IIC 53</p>
<p>5mm Impacta ProBase</p> <p>Glue down Engineered hardwood over 5mm ProBase over 8" slab with a ceiling below</p>		<p>IIC 72</p>