

Spec Data Sheet SQ-102



- ◆ **High-impact, abuse-resistant**
- ◆ **Excellent sound reduction**
- ◆ **Class A fire rated**
- ◆ **Standard, designer or C.O.M. fabric**

Sound Quality® Acoustical Wall Panels by Sound Seal® are the solution for areas that require noise reduction and are available in a variety of models for various applications. The **S-2100** Wall Panel is manufactured to the highest standards and is specifically designed as an impact resistance absorber panel that offers both excellent absorption and high durability. Application for the S-2100 panels includes schools, gymnasiums, corridors, offices, airports, churches, restaurants and any area where acoustics and impact resistance is required.



The S-2100 High-Impact Wall Panels are ideal for environments that combine the need for superior acoustical performance and resilience to high traffic areas. S-2100 Panels are constructed using a 6-7# rigid fiberglass absorber core laminated to 16#-20# PCF high-impact underlayment. The edges are chemically hardened and are available in 4 edge profiles. S-2100 panels are available in 5/8", 1 1/8", 1 1/2" and 2 1/8" thickness.

These panels are available in standard or custom sizes (up to a maximum of 5' x 10') with custom, designer or C.O.M. fabric available.

S-2100 panels are easily installed on walls or ceilings using mechanical clips, adhesive hook & loop. Consult with factory on the best-suited mounting for your specific application.

S-2100
HIGH-IMPACT
WALL PANELS


Spec Data Sheet **SQ-102**



Finishes

Guilford of Maine FR701 Style 2100 is standard. Hundreds of approved decorator fabrics are also available from numerous manufacturers including, but not limited to: Guilford of Maine, Deepa Textiles, Design Tex, Wolf Gordon, Momentum and Knoll. Customers may also specify their own fabric, provided the material meets manufacturing requirements.

Mounting Options

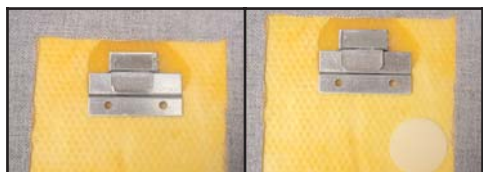

**2-part
Mechanical
Clips**


Clip & Velcro




Adhesive

Impaling Clip


Edge Detail




Square



Mitre



Bevel



Radius

Acoustical

NRC Rating

5/8"060
1 1/8"095
2 1/8"105

Test data available upon request

Fire Rating

All components shall have a Class A fire rating per ASTM E-84.

Specifications

Specifications can be downloaded from our website www.soundseal.com or call us at 1-800-569-1294.

Sound Seal® and Sound Quality® are registered trademarks of United Process, Inc. ©2003 United Process, Inc.