



- ◆ **Reflective properties for excellent sound quality and clarity**
- ◆ **Class A fire rated**
- ◆ **Standard, designer or C.O.M. fabric**

**Sound Quality®** Acoustical Wall Panels by Sound Seal® are the solution for areas that require noise reduction and are available in a variety of models for various applications. The **S-3000** Wall Panel is manufactured specifically as a flat reflector panel that offers sound reflection. Application for the S-3000 panels includes auditoriums, concert halls, churches and any are where sound reflection is necessary to enhance the room acoustics.



S-3000 Reflective Wall Panels are frequently used in conjunction with our S-2000 absorber panels. The combination of both the S-2000 and S-3000 panels provides both the absorption and reflection necessary to enhance the room acoustics by reflecting and absorbing excessive sound thereby improving the quality of sound and speech understanding.

S-3000 panels are manufactured with an MDF core in thickness to match S-2000 panels or standard thickness of ½", ⅝" and ¾" with sizes up to a maximum of 4' x 10.' The edges are fully wrapped in standard, designer or C.O.M. fabric with 4 edge detail options.

S-3000 panels are lightweight and easily installed on walls with a two-part mechanical clips or nails and construction adhesive.

**S-3000**

REFLECTIVE  
WALL PANELS


Spec Data Sheet **SG-104**



**Finishes**

Guilford of Maine FR701 Style 2100 is standard. Hundreds of approved decorator fabrics are also available from numerous manufacturers including, but not limited to: Guilford of Maine, Deepa Textiles, Design Tex, Wolf Gordon, Momentum and Knoll. Customers may also specify their own fabric, provided the material meets manufacturing requirements.

**Mounting Options**

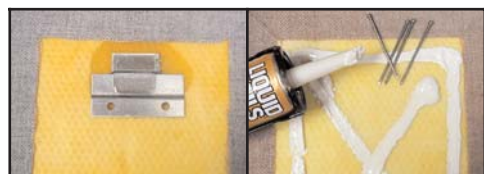

2-part  
Mechanical  
Clips

Adhesive


**Acoustical**

Octave Band Frequency


Mount	125	250	500	1000	2000	4000	NRC
	.15	.11	.10	.07	.06	.07	.10

Test data available upon request


**Edge Detail**




Square



Mitre



Bevel



Radius

**Fire Rating**

All components shall have a Class A fire rating per ASTM E-84.

**Specifications**

Specifications can be downloaded from our website [www.soundseal.com](http://www.soundseal.com) or call us at 1-800-569-1294.

Sound Seal® and Sound Quality® are registered trademarks of United Process, Inc. ©2003 United Process, Inc.