


Spec Data Sheet SQ-106



- ◆ **High-quality, economical, multi-purpose panels**
- ◆ **Excellent acoustical performance**
- ◆ **Class A fire rated**
- ◆ **Standard, designer or C.O.M. fabric**

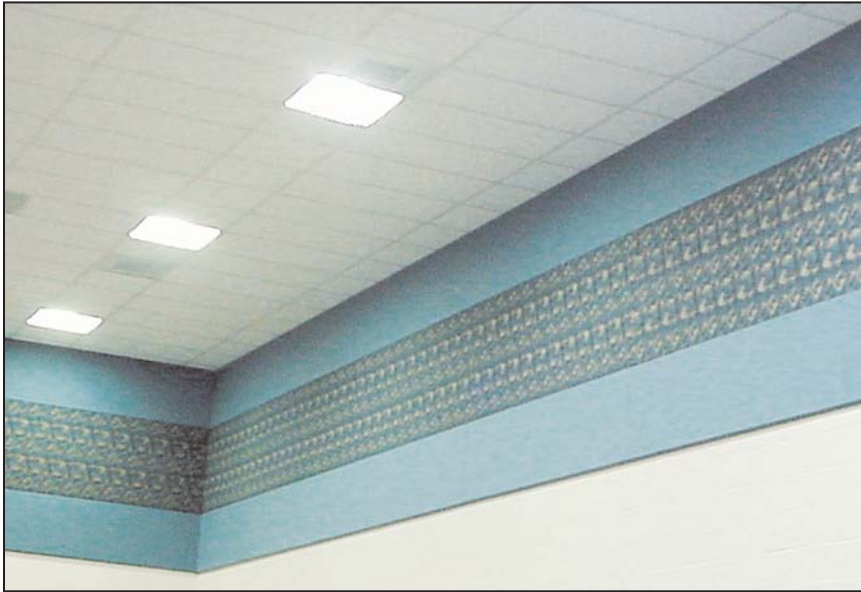

Sound Quality® Acoustical Wall Panels by Sound Seal® are the solution for areas that require noise reduction and are available in a variety of models for various applications. The **S-4000** Wall Panel is manufactured specifically as a high abuse absorber panel that offers both excellent absorption and high durability. Application for the S-4000 panels includes gymnasiums, schools, universities, prisons, recreation centers and any area where excess reverberation and abuse resistance is required.

S-4000 High-Abuse Wall Panels are constructed using a high impact $\frac{1}{8}$ " thick perforated co-polymer underlayment laminated over a 1" or 2" thick 6-7 PCF fiberglass absorber core. The panels are fully wrapped in standard, custom or C.O.M fabric. Panels are available in $\frac{1}{8}$ " and $\frac{2}{8}$ " thickness with sizes up to a maximum of 4' x 10'.

S-4000 panels are easily installed using mechanical clips or adhesive and impaling clips. Consult with factory on the best-suited mounting for your specific application.

WALL PANELS

S-4000

HIGH ABUSE WALL PANELS


Spec Data Sheet **SQ-106**



Finishes

Guilford of Maine FR701 Style 2100 is standard. Hundreds of approved decorator fabrics are also available from numerous manufacturers including, but not limited to: Guilford of Maine, Deepa Textiles, Design Tex, Wolf Gordon, Momentum and Knoll. Customers may also specify their own fabric, provided the material meets manufacturing requirements.

Mounting Options

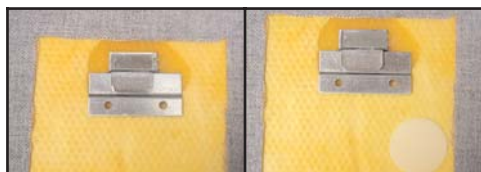

**2-part
Mechanical
Clips**

Clip & Velcro


Acoustical

NRC Rating


1 1/16"80 - .90
2 1/16"	1.05 - 1.15

Test data available upon request


Edge Detail



Square



Mitre



Bevel

Specifications

Specifications can be downloaded from our website www.soundseal.com or call us at 1-800-569-1294.

Fire Rating

All components shall have a Class A fire rating per ASTM E-84.

Sound Seal® and Sound Quality® are registered trademarks of United Process, Inc.
©2003 United Process, Inc.