IMPACTA®
BY SOUND SEAL

PROBASE VINYL





Vinyl Composition Tile (VCT) should not be installed over **ProBase Vinyl**, Jumpax would be the correct product with VCT


PROBASE VINYL SPECIFICALLY DESIGNED **FOR USE UNDER BOTH DRY BACK AND GLUE DOWN** LVP/ LVT, SHEET VINYL, CARPET AND CARPET TILE FLOORING.

ProBase Vinyl contains zero rubber so plasticize migration will not occur and is made entirely of polyurethane foam and cork. ProBase Vinyl is age resistant for decades for durability under point loads and at only 3mm but will add excellent acoustic improvement to the floor assembly.

- Offers long term performance without collapse or bottoming out
- Suitable for both new construction & renovations
- Quick & easy installation
- Resistant to aging & deformation

SPECIFICATIONS

Material:	Polyurethane foam/cork
Roll Size:	39” x 65’ x 6” (213 sq ft roll)
Thickness:	3mm
Weight Per Roll:	65 lbs.
Density:	45 lbs./cubic ft
Hardness A Shore Durometer:	54-64
Temperature Resistance:	-40 - 110 c
Sound Reduction:	ΔIIC 22

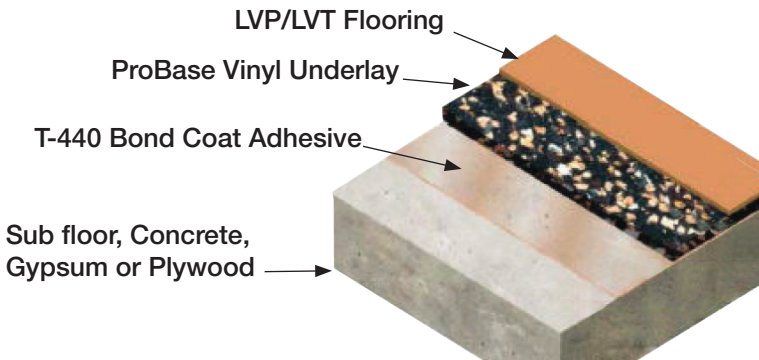

SOUND SEAL®

www.soundseal.com

A CATALYST ACOUSTICS GROUP COMPANY