IMPACTA
Acoustical Floor Underlayments

ProBase

12mm





MADE FROM 92% RECYCLED TIRE RUBBER!

ACOUSTICAL UNDERLAYMENT **FOR HARDWOOD FLOORING**

IMPACTA ProBase 12mm floor underlayment is made from recycled rubber tires. ProBase is used under floated or double glued hardwood flooring. ProBase can also be used under lightweight concrete topping. ProBase is excellent for use in lightweight wood frame construction due to its weight & mass. ProBase is 1/2" thick and comes in rolls 4' x 25' (100 sq ft rolls).

SPECIFICATIONS

- Thickness:12mm
- Density (ASTM D-792): 43 lbs. cubic ft.
- Standard width: 48" wide
- Roll length: 25' long
- Weight: 2.0 lbs. psf
- Hardness A Shore-Durometer: 40-55

FEATURES

- 92% recycled content, qualifies for up to 5 Leed Points
- IIC rating 50+
- Easy to install, 4' x 50' rolls
- Sound control underlay for tile, stone, hardwood & carpet

A SUSTAINABLE SOLUTION GreenCircle CERTIFIED ™

SOUND SEAL®

www.soundseal.com

ACOUSTIC PERFORMANCE ON BACK

IMPACTA
Acoustical Floor Underlayments

ProBase

12mm




12mm IMPACTA ProBase ACOUSTICAL TEST

12mm IMPACTA ProBase Floated Engineered hardwood over 12mm ProBase over 6” slab




IIC/FIIC RATING: 23

12mm IMPACTA ProBase Floated Engineered hardwood over 12mm ProBase over 1 1⁄2” gypsum topping over 16” TJI – 24 centers RC1 channel – 1 layer 5/8 GWB

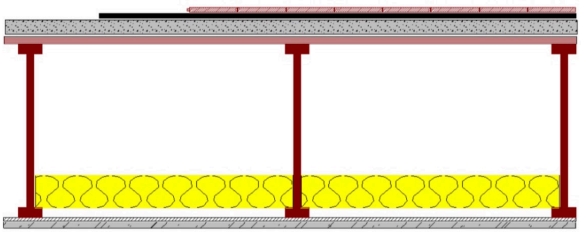

IIC/FIIC RATING: IIC 57

12mm IMPACTA ProBase 3⁄4” Marble flooring bonded with thin set to 12mm ProBase glued to 8” slab



IIC/FIIC RATING: FIIC 55

SOUND SEAL®

www.soundseal.com