IMPACTA
Acoustical Floor Underlayments

ProBase

3mm





MADE FROM 92% RECYCLED TIRE RUBBER!

ACOUSTICAL UNDERLAYMENT **FOR HARDWOOD FLOORING**

IMPACTA ProBase 3mm floor underlayment is made from recycled rubber tires. ProBase underlay is used under wood flooring. ProBase is excellent for use in lightweight wood frame construction due to its weight & mass. ProBase underlayment is 3mm thick and comes in rolls 4' x 50' (200 sq ft rolls).

SPECIFICATIONS

- Thickness: 3mm
- Density (ASTM D-792): 43 lbs. cubic ft.
- Standard width: 48" wide
- Roll length: 50' long
- Weight: .50 lb psf
- Hardness A Shore-Durometer: 40-55

FEATURES

- 92% recycled content, qualifies for up to 5 Leed Points
- IIC rating 50+
- Easy to install, 4' x 50' rolls
- Sound control underlay for hardwood

SOUND SEAL®

www.soundseal.com

A SUSTAINABLE SOLUTION GreenCircle CERTIFIED™

ACOUSTIC PERFORMANCE ON BACK

IMPACTA
Acoustical Floor Underlayments


ProBase

3mm




3mm IMPACTA ProBase ACOUSTICAL TEST

3mm IMPACTA ProBase Floated Engineered Hardwood over 3mm ProBase over 6” slab



IIC/FIIC RATING: 21

3mm IMPACTA ProBase Floated Engineered Hardwood over 3mm ProBase over 6” slab with a ceiling below

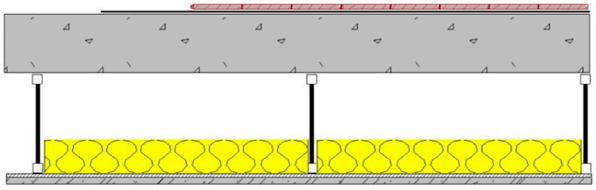

IIC/FIIC RATING: IIC 60

3mm IMPACTA ProBase 6” x 6” x 1⁄2” unglazed quarry tile bonded with thin set to 3mm ProBase glued to 6” slab




IIC/FIIC RATING: 20

3mm IMPACTA ProBase Glue down Engineered Hardwood over 3mm ProBase over 8” slab



IIC/FIIC RATING: IIC 52

3mm IMPACTA ProBase Glue down Engineered Hardwood over 3mm ProBase over 8” slab with a ceiling below

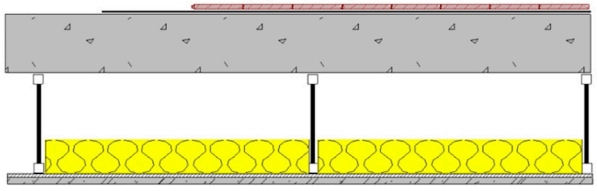

IIC/FIIC RATING: IIC 70

SOUND SEAL®

www.soundseal.com