IMPACTA
Acoustical Floor Underlayments

ProBase

6mm





MADE FROM 92% RECYCLED TIRE RUBBER!

ACOUSTICAL UNDERLAYMENT **FOR HARDWOOD FLOORING**

IMPACTA ProBase 6mm floor underlayment is made from recycled rubber tires. ProBase 6 is used under wood flooring. ProBase is excellent for use in lightweight wood frame construction due to its weight & mass. ProBase 6 is 1/4" thick and comes in rolls 4' x 25' (100 sq ft rolls).

Typical uses include; apartments, homes, condos, schools, hospitals and any areas where reduction from structural impact noise through the floor to ceiling assembly is required. ProBase underlayment can be installed over concrete, gypsum topping and structural sound plywood sub floors.

SPECIFICATIONS

- Thickness: 6mm
- Density (ASTM D-792): 43 lbs. cubic ft.
- Standard width: 48" wide
- Roll length: 25' long
- Weight: 1.0 lb psf
- Hardness A Shore-Durometer: 40-55

FEATURES

- 92% recycled content, qualifies for up to 5 Leed Points
- IIC rating 50+
- Easy to install, 4' x 25' rolls
- Sound control underlay for tile, stone, & hardwood

A SUSTAINABLE SOLUTION GreenCircle CERTIFIED ™

SOUND SEAL®

www.soundseal.com

ACOUSTIC PERFORMANCE ON BACK

IMPACTA
Acoustical Floor Underlayments


ProBase

6mm




6mm IMPACTA ProBase ACOUSTICAL TEST

6mm IMPACTA ProBase Floated Engineered hardwood over 6mm ProBase over 6" slab



IIC/FIIC RATING: 22

6mm IMPACTA ProBase Floated Engineered hardwood over 6mm ProBase over 1 1⁄2" gypsum topping over 16" TJI – 24 centers RC1 channel – 1 layer 5/8 GWB

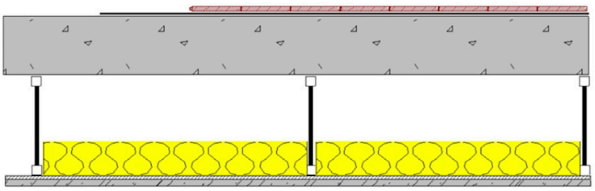

IIC/FIIC RATING: IIC 57

MADE FROM 92% RECYCLED TIRE RUBBER!



SOUND SEAL®

www.soundseal.com