IMPACTA
Acoustical Floor Underlayments

ProBase

10mm





MADE FROM
92% RECYCLED
TIRE RUBBER!

ACOUSTICAL UNDERLAYMENT **FOR TILE, STONE AND CARPET**

IMPACTA ProBase 3mm floor underlayment is made from recycled rubber tires. ProBase 10 is used under a variety of floors including, tile/marble, carpet and wood flooring. ProBase is excellent for use in lightweight wood frame construction due to its weight & mass. ProBase 10 is 3/8" thick and comes in rolls 4' x 25' (100 sq ft rolls).

Typical uses include; apartments, homes, condos, schools, hospitals and any areas where reduction from structural impact noise through the floor to ceiling assembly is required. ProBase underlayment can be installed over concrete, gypsum topping and structural sound plywood sub floors.

SPECIFICATIONS

- Thickness:10mm
- Density (ASTM D-792): 43 lbs. cubic ft.
- Standard width: 48" wide
- Roll length: 25' long
- Weight: 1.65 lb psf
- Hardness A Shore-Durometer: 40-55

FEATURES

- 92% recycled content, qualifies for up to 5 Leed Points
- IIC rating 50+
- Easy to install, 4' x 50' rolls
- Sound control underlay for tile, stone, hardwood & carpet

A SUSTAINABLE SOLUTION GreenCircle CERTIFIED ™

ACOUSTIC PERFORMANCE ON BACK

SOUND SEAL®

www.soundseal.com

IMPACTA
Acoustical Floor Underlayments


ProBase

10mm




10mm IMPACTA ProBase
ACOUSTICAL TEST

10mm IMPACTA ProBase Glue down Engineered hardwood over 10mm ProBase over 6” slab




IIC/FIIC RATING: 22

10mm IMPACTA ProBase Glue down Engineered hardwood over 10mm ProBase over 6” slab with a ceiling below

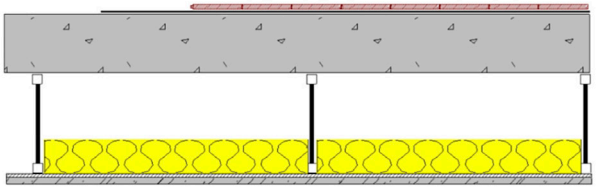


IIC/FIIC RATING: IIC 72

10mm IMPACTA ProBase Glue down Engineered hardwood over 10mm ProBase over 8” slab



IIC/FIIC RATING: 54

10mm IMPACTA ProBase Glue down Engineered hardwood over 10mm ProBase over 8” slab with a ceiling below

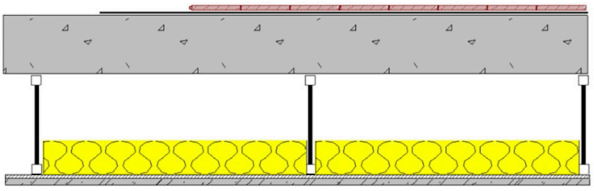

IIC/FIIC RATING: IIC 74

SOUND SEAL®

www.soundseal.com