IMPACTA
Acoustical Floor Underlayments

ProBase

12mm





MADE FROM
92% RECYCLED
TIRE RUBBER!

ACOUSTICAL UNDERLAYMENT **FOR TILE, STONE AND CARPET**

IMPACTA ProBase 12mm floor underlayment is made from recycled rubber tires. ProBase is used under floated or double glued hardwood, marble & stone flooring & carpet flooring. ProBase can also be used under lightweight concrete topping. ProBase is excellent for use in lightweight wood frame construction due to its weight & mass. ProBase is 1/2" thick and comes in rolls 4' x 25' (100 sq ft rolls).

SPECIFICATIONS

- Thickness:12mm
- Density (ASTM D-792): 43 lbs. cubic ft.
- Standard width: 48" wide
- Roll length: 25' long
- Weight: 2.0 lbs. psf
- Hardness A Shore-Durometer: 40-55

FEATURES

- 92% recycled content, qualifies for up to 5 Leed Points
- IIC rating 50+
- Easy to install, 4' x 50' rolls
- Sound control underlay for tile, stone, hardwood & carpet

A SUSTAINABLE SOLUTION
GreenCircle CERTIFIED ™

SOUND SEAL®

www.soundseal.com

ACOUSTIC PERFORMANCE ON BACK

IMPACTA
Acoustical Floor Underlayments

ProBase

12mm




12mm IMPACTA ProBase ACOUSTICAL TEST

12mm IMPACTA ProBase Floated Engineered hardwood over 12mm ProBase over 6” slab




IIC/FIIC RATING: 23

12mm IMPACTA ProBase Floated Engineered hardwood over 12mm ProBase over 1 1⁄2” gypsum topping over 16” TJI – 24 centers RC1 channel – 1 layer 5/8 GWB

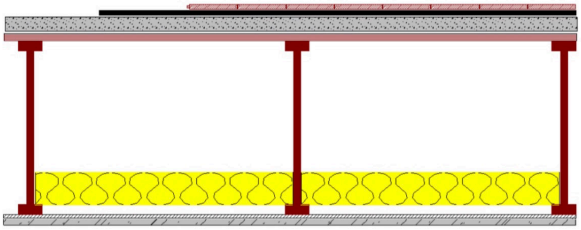

IIC/FIIC RATING: IIC 57

12mm IMPACTA ProBase 3⁄4” Marble flooring bonded with thin set to 12mm ProBase glued to 8” slab



IIC/FIIC RATING: FIIC 55

SOUND SEAL®

www.soundseal.com