IMPACTA
Acoustical Floor Underlayments

ProBase

5mm





MADE FROM
92% RECYCLED
TIRE RUBBER!

ACOUSTICAL UNDERLAYMENT **FOR TILE, STONE AND CARPET**

IMPACTA ProBase 5mm floor underlayment is made from recycled rubber tires. ProBase 5 is used under tile/marble, carpet and wood flooring. ProBase is excellent for use in lightweight wood frame construction due to its weight & mass. ProBase 5 is 3/16" thick and comes in rolls 4' x 25' (100 sq ft rolls).

Typical uses include; apartments, homes, condos, schools, hospitals and any areas where reduction from structural impact noise through the floor to ceiling assembly is required. ProBase underlayment can be installed over concrete, gypsum topping and structural sound plywood sub floors.

SPECIFICATIONS

- Thickness: 5mm
- Density (ASTM D-792): 43 lbs. cubic ft.
- Standard width: 48" wide
- Roll length: 25' long
- Weight: .80 lb psf
- Hardness A Shore-Durometer: 40-55

FEATURES

- 92% recycled content, qualifies for up to 5 Leed Points
- IIC rating 50+
- Easy to install, 4' x 50' rolls
- Sound control underlay for tile, stone, & hardwood

A SUSTAINABLE SOLUTION
GreenCircle CERTIFIED ™

ACOUSTIC PERFORMANCE ON BACK

SOUND SEAL®

www.soundseal.com

IMPACTA
Acoustical Floor Underlayments


ProBase

5mm




5mm IMPACTA ProBase ACOUSTICAL TEST

5mm IMPACTA ProBase Floated Engineered Hardwood over 5mm ProBase over 6” slab



IIC/FIIC RATING: 21 / IIC 51

5mm IMPACTA ProBase Floated Engineered Hardwood over 5mm ProBase over 6” slab with a ceiling below

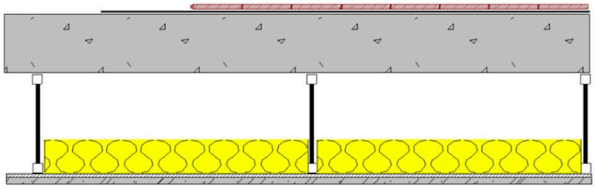

IIC/FIIC RATING: IIC 71

5mm IMPACTA ProBase 6” x 6” x 1⁄2” unglazed quarry tile bonded with thin set to 5mm ProBase glued to 8” slab




IIC/FIIC RATING: IIC 52

5mm IMPACTA ProBase Glue down Engineered Hardwood over 5mm ProBase over 8” slab



IIC/FIIC RATING: IIC 53

5mm IMPACTA ProBase Glue down Engineered Hardwood over 5mm ProBase over 8” slab with a ceiling below

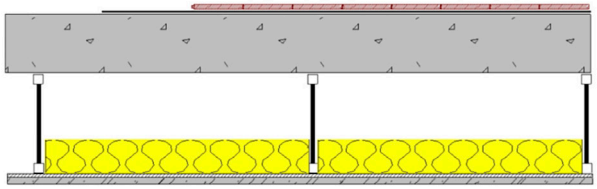

IIC/FIIC RATING: IIC 72

SOUND SEAL®

www.soundseal.com