


Standard Unit





Open top, non-slotted cavities for reinforcing bars and grout

Spacing of vertical reinforcing at multiples of 16" as required (I.e; 32: 48" etc)

A course of standard bond beam used for horizontal reinforcement as needed

Left-and Right Hand Units

Available in 8" A-1, 8" Q and 8" & 12" RSC

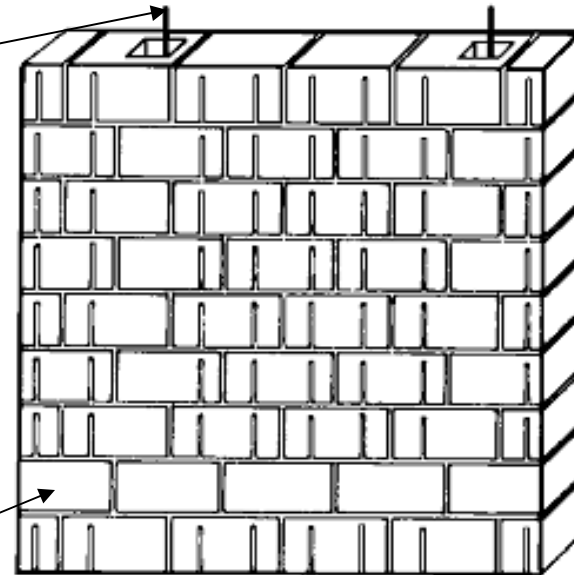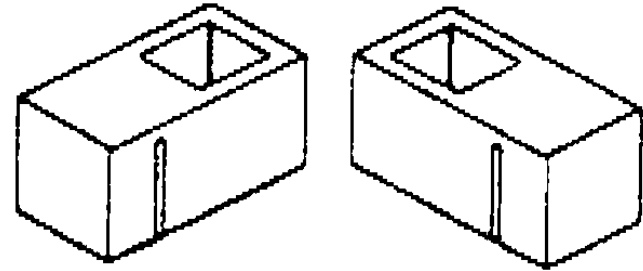

 Acoustical Masonry

BY SOUND SEAL

50 HP Almgren Drive - Agawam, MA 01001
413-789-1770 www.acousticalmasonry.com