

T
E
T
R
I
X



TETRIX™ | PET Polyester Acoustical Panel

When it's about more than sound. Our Poly-Coustix product line is a designer's dream. A beautifully crafted solution to meet any acoustical needs.



POLY-COUSTIX®
BY SOUND SEAL

SPECIFICATIONS

Panel Sizes:	23-1/2"x 23-1/2" or 23-1/2"x 47"
Thickness:	9mm
Edge Detail:	Chamfered
Weight:	.25 lbs/SF
Fire Rating:	Class A per ASTM E-84

FEATURES:

- Quick and Easy Installation
- Lightweight and Easy to Handle
- Choice of 34 Colors
- Chamfered Edge Detail


INSTALL METHODS:

Construction Panel Adhesive, Carpet Glue or Nail Clips with Adhesive

ACOUSTICAL DATA

Frequency (Hz)	125	250	500	1000	2000	4000	NRC
9mm Thickness	.04	.04	.16	.40	.63	.82	.30

Tested as Type "A" Mounting

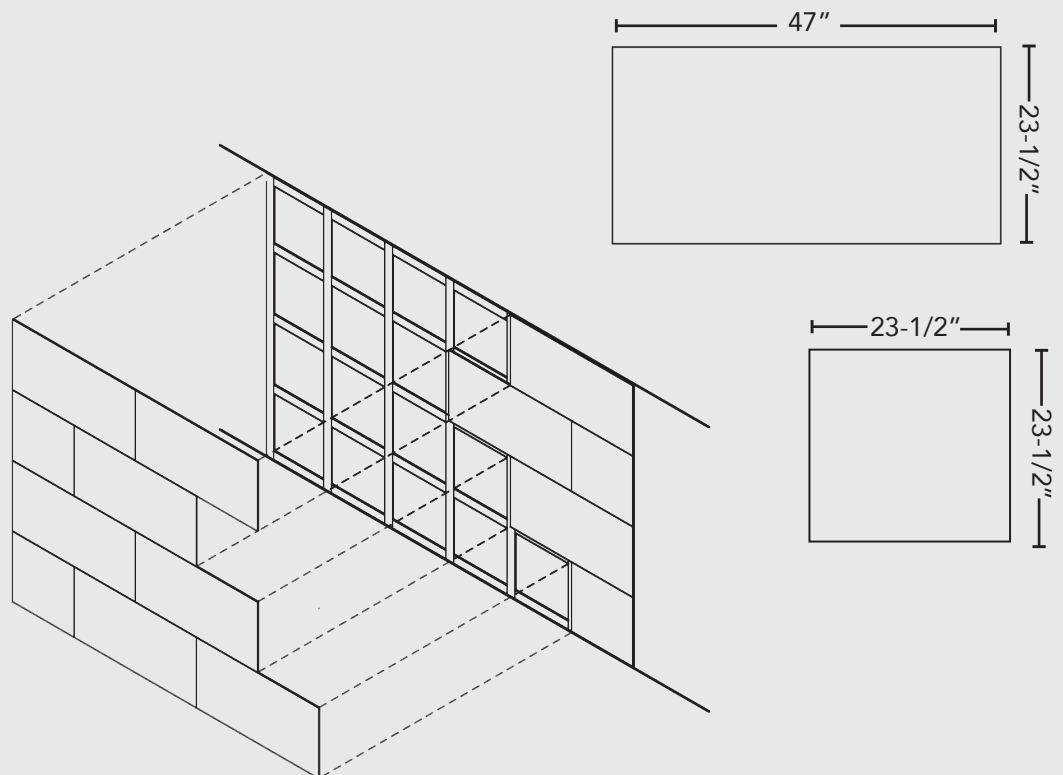

TETRIX™ | PET Polyester Acoustical Panel

TETRIX™

COMPOSITION:

- 100% Polyethylene Terephthalate (PET)
- 55% recycled content

ENVIRONMENTAL FACTORS:

- 100% recyclable
- Low VOC Emissions
- ASTM - D5116
- LEED - MRc4

FINISHES

						
07 White	44 Ivory	42 Cream	52 Latte	53 Smoke Beige	02 Taupe	35 Speckled Earth
						
49 Brunette	54 Espresso	45 Big Red	43 Lava	36 Berry Red	55 Tangerine	50 Caramel
						
41 Marigold	51 Sunkist Orange	22 Yellow	39 Green Apple	12 Moss	48 Avocado	05 Dark Green
						
47 Emerald	18 Arctic Ice	30 Blue	56 Azure	19 Denim	21 Indigo Blue	09 Deep Blue
						
08 Eggplant	03 Light Gray	34 Pure Gray	11 Steel	17 Dark Gray	10 True Black	



POLY-COUSTIX®
BY SOUND SEAL

A CATALYST ACOUSTICS GROUP COMPANY

SOUND SEAL®


www.soundseal.com