

Impacta-ProBase

3mm Acoustical Floor Underlayment



Impacta-ProBase 3mm floor underlayment is made from recycled rubber tires. ProBase underlay is used under tile/marble, and wood flooring. ProBase is excellent for use in lightweight wood frame construction due to its weight & mass. ProBase underlayment is 3mm thick and comes in rolls 4' x 50' (200 sq ft rolls)

Applications:

Typical uses include; apartments, homes, condos, schools, hospitals and any areas where reduction from structural impact noise through the floor to ceiling assembly is required. ProBase underlayment can be installed over concrete, gypsum topping and structural sound plywood sub floors.



- 92% recycled content, qualifies for up to 5 Leed Points
- IIC rating 50+
- Easy to install, 4' x 50' rolls
- Sound control underlay for tile, stone, & Hardwood

Product Data:

Description Made from 92% recycled SBR (Styrene-Butadiene Rubber) tire rubber


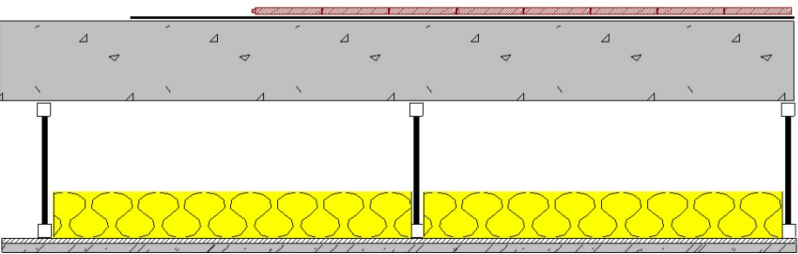
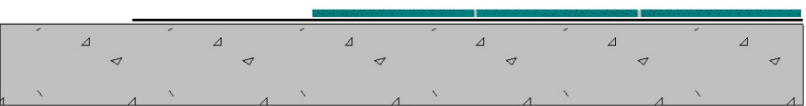

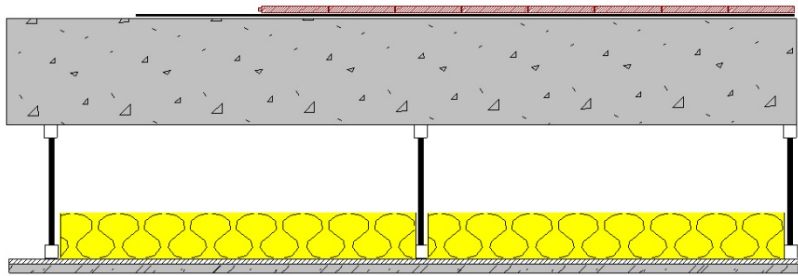
Nominal thickness	3mm
Density (ASTM D-792)	43 lbs cubic ft
Standard width	48" wide
Roll length	50' long
Weight	.50 lb psf
Hardness A Shore-Durometer	40-55



Distributed by:

Acoustics performance on back page

Impacta ProBase 3mm Acoustical Testing

Description	Detail	IIC / FIC Rating
<p>3mm Impacta ProBase</p> <p>Floated Engineered Hardwood over 3mm ProBase over 6" slab</p>		<p>Δ 21</p>
<p>3mm Impacta ProBase</p> <p>Floated Engineered Hardwood over 3mm ProBase over 6" slab with a ceiling below</p>		<p>IIC 60</p>
<p>3mm Impacta ProBase</p> <p>6" x 6" x 1/2" unglazed quarry tile bonded with thin set to 3mm ProBase glued to 6" slab</p>		<p>Δ 20</p>
<p>3mm Impacta ProBase</p> <p>Glue down Engineered Hardwood over 3mm ProBase over 8" slab</p>		<p>IIC 52</p>
<p>3mm Impacta ProBase</p> <p>Glue down Engineered Hardwood over 3mm ProBase over 8" slab with a ceiling below</p>		<p>IIC 70</p>