

T
E
T
R
I
X



TETRIX™ | PET Polyester Acoustical Panel

When it's about more than sound. Our Poly-Coustix product line is a designer's dream. A beautifully crafted solution to meet any acoustical needs.



POLY-COUSTIX™
BY SOUND SEAL

SPECIFICATIONS

Panel Sizes:	23-1/2"x 23-1/2" or 23-1/2"x 47"
Thickness:	9mm
Edge Detail:	Chamfered
Weight:	.25 lbs/SF
Fire Rating:	Class A per ASTM E-84

FEATURES:

- Quick and Easy Installation
- Lightweight and Easy to Handle
- Choice of 35 Colors
- Chamfered Edge Detail


INSTALL METHODS:

Construction Panel Adhesive, Carpet Glue or Nail Clips with Adhesive

ACOUSTICAL DATA

Frequency (Hz)	125	250	500	1000	2000	4000	NRC
9mm Thickness	.04	.04	.16	.40	.63	.82	.30

Tested as Type "A" Mounting

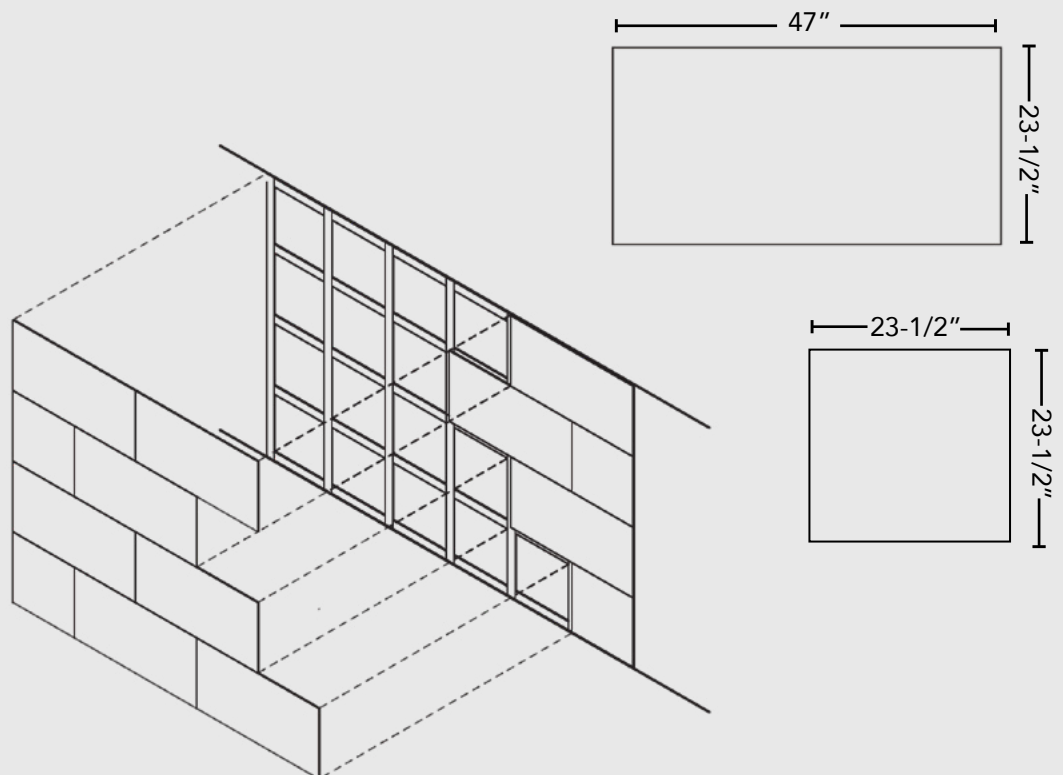

TETRIX AIR™ | PET Polyester Acoustical Panel

FINISHES



TETRIX™

COMPOSITION:

- 100% Polyethylene Terephthalate (PET)
- 55% recycled content

ENVIRONMENTAL FACTORS:

- 100% recyclable
- Low VOC Emissions
- ASTM - D5116
- LEED - MRc4

